




1. RF Output Power, Duty Cycle, Tx-sequence, Tx-gap, Medium Utilization


1.1 Test Result



Test Mode	Test Condition	Test Frequency (MHz)	Ant No.	Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
1M	NTNV	2402	1	-1.15	0.85	20.00	PASS
		2440	1	-1.24	0.76	20.00	PASS
		2480	1	-2.14	-0.14	20.00	PASS
	HTNV	2402	1	-1.14	0.86	20.00	PASS
		2440	1	-1.23	0.77	20.00	PASS
		2480	1	-2.12	-0.12	20.00	PASS
	LTNV	2402	1	-1.15	0.85	20.00	PASS
		2440	1	-1.24	0.76	20.00	PASS
		2480	1	-2.14	-0.14	20.00	PASS



1.2 Test Graph

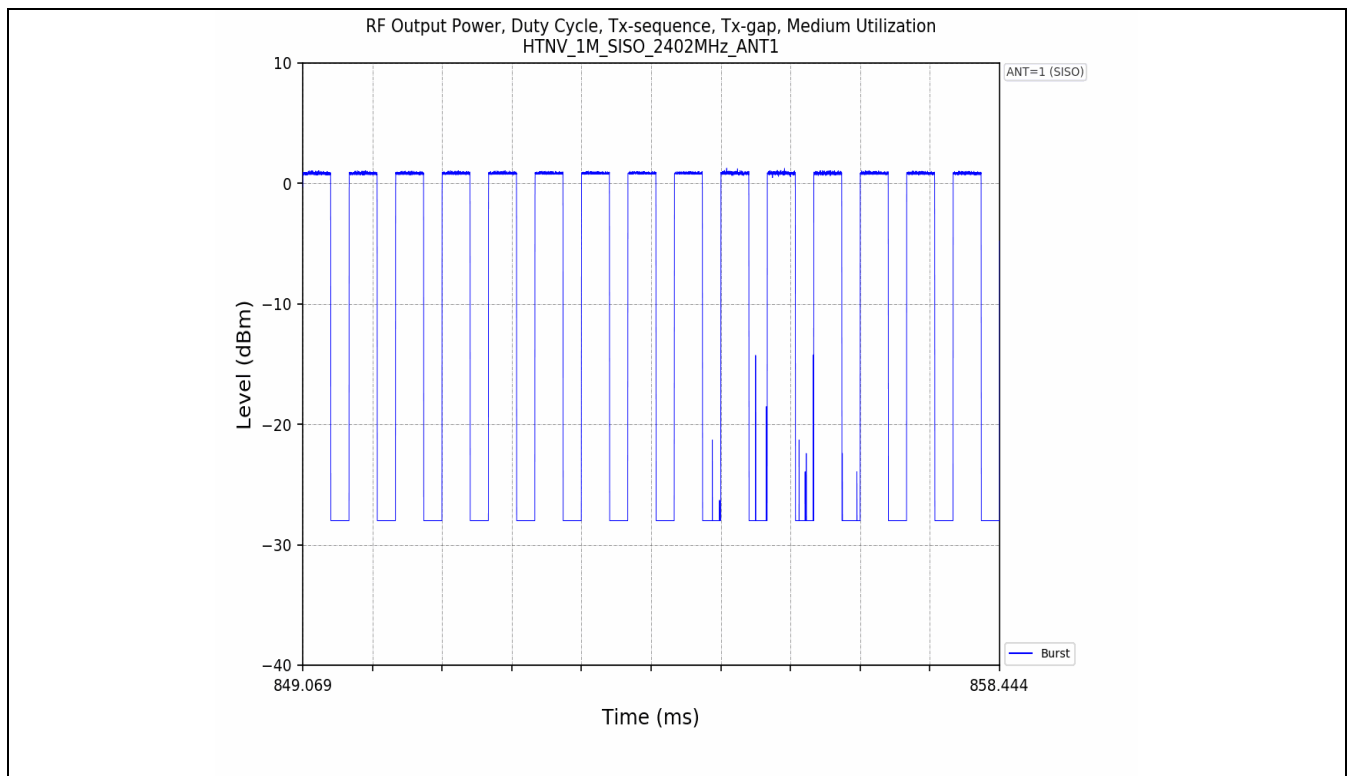

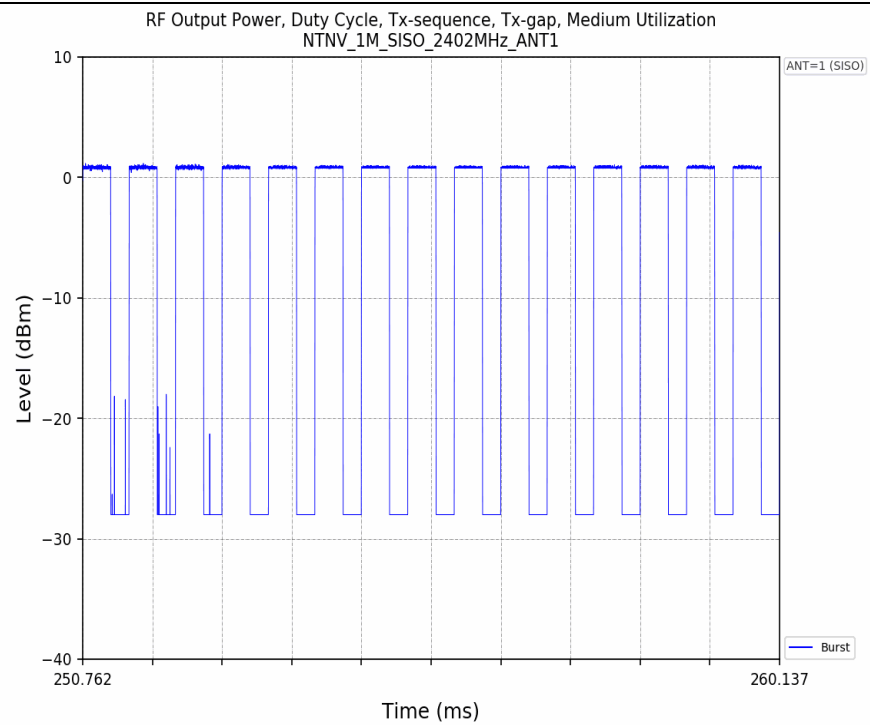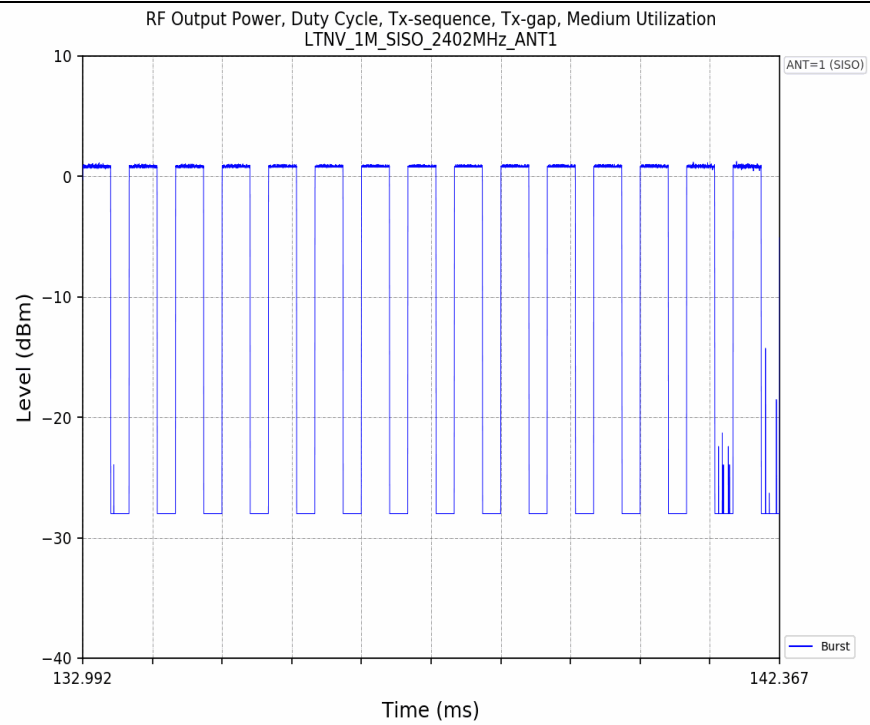

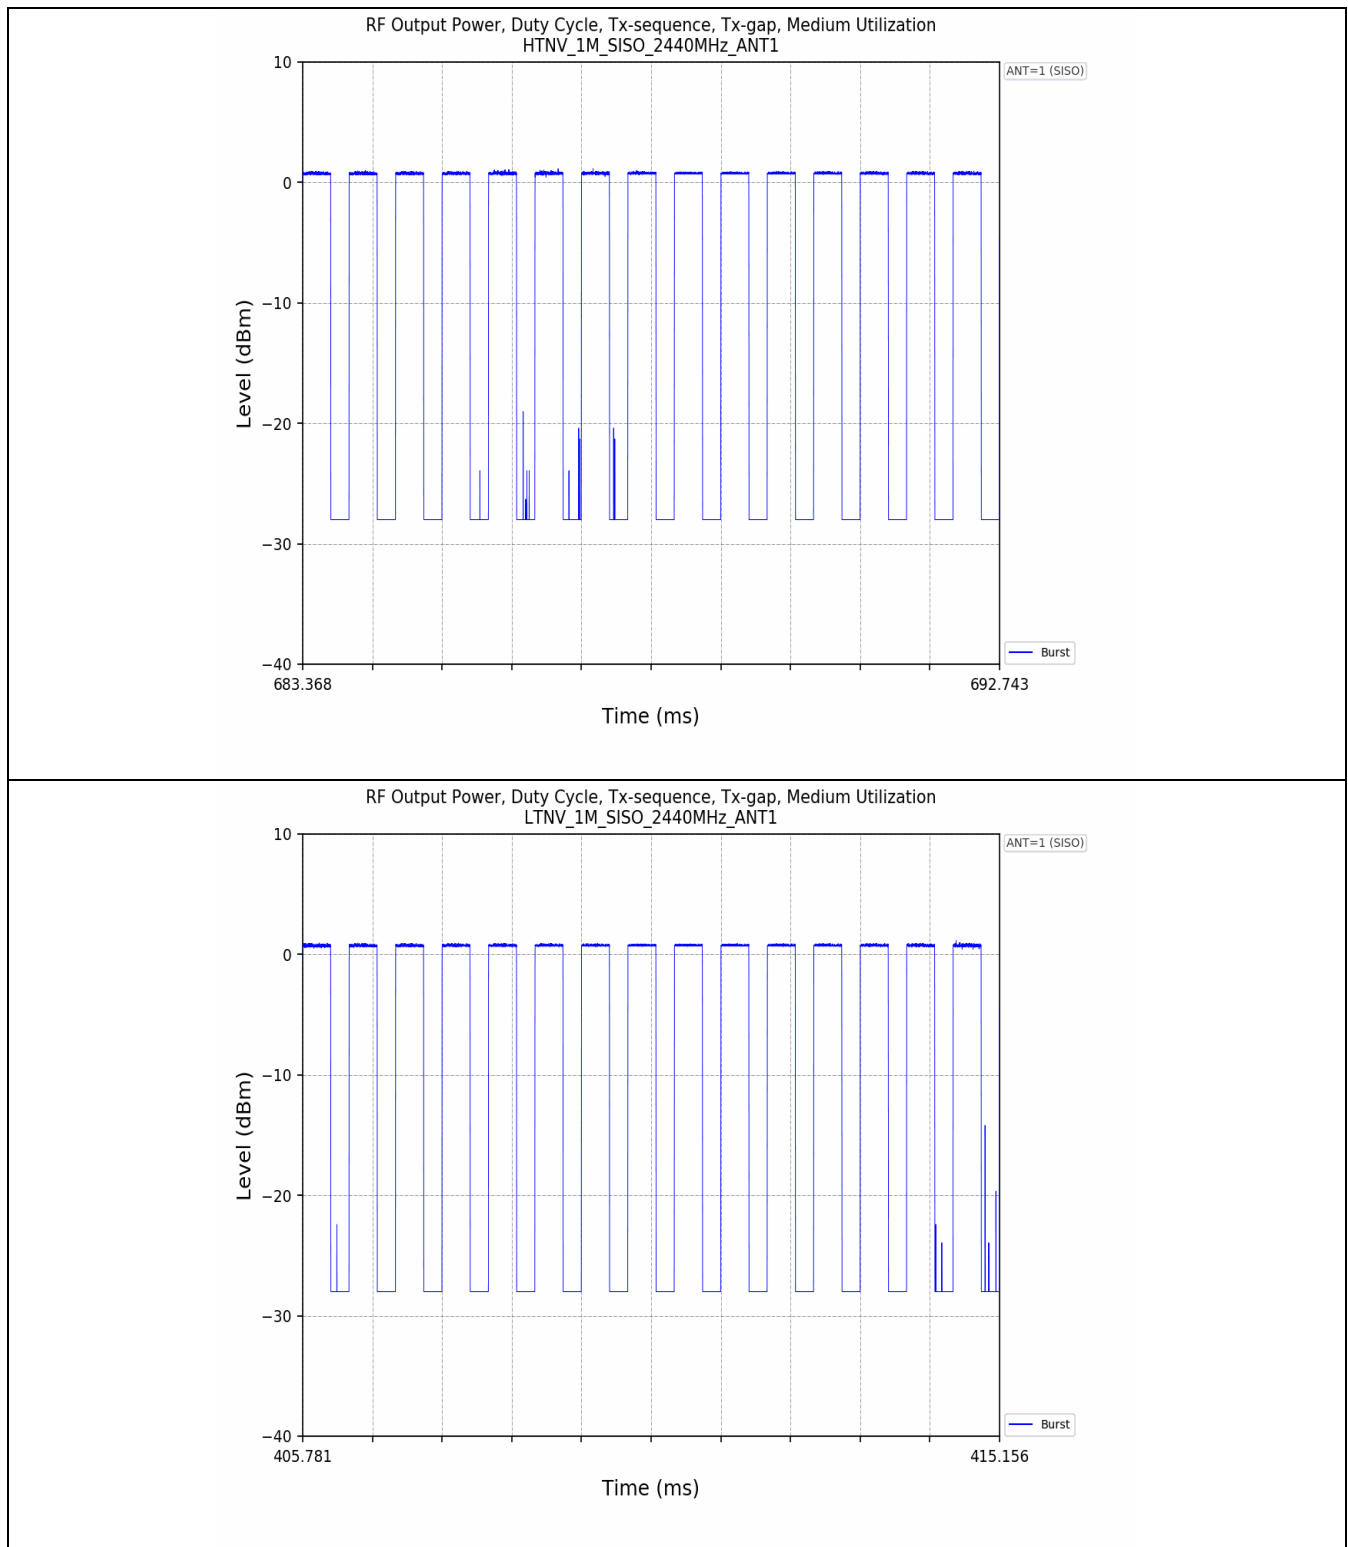

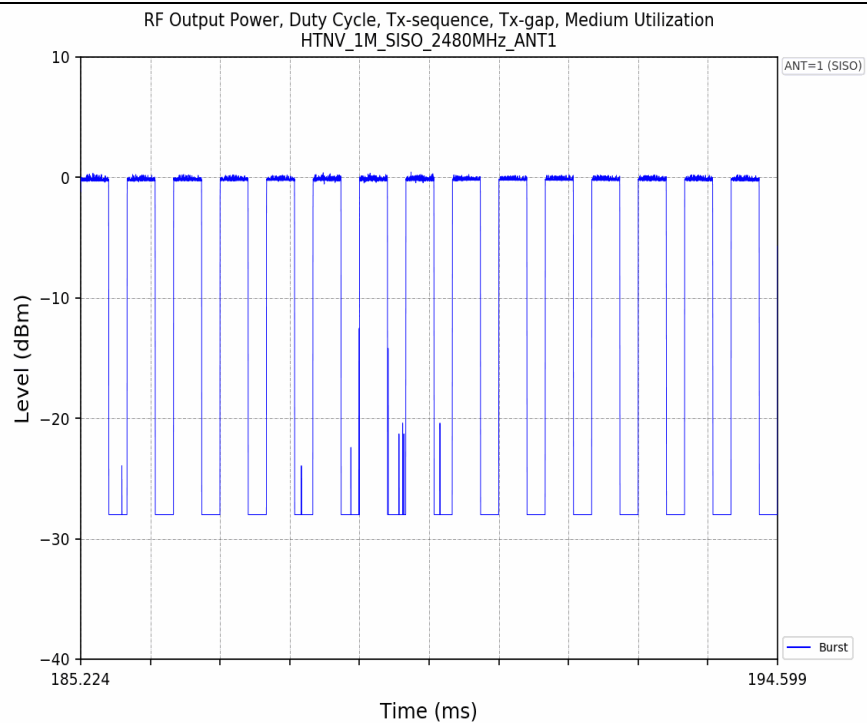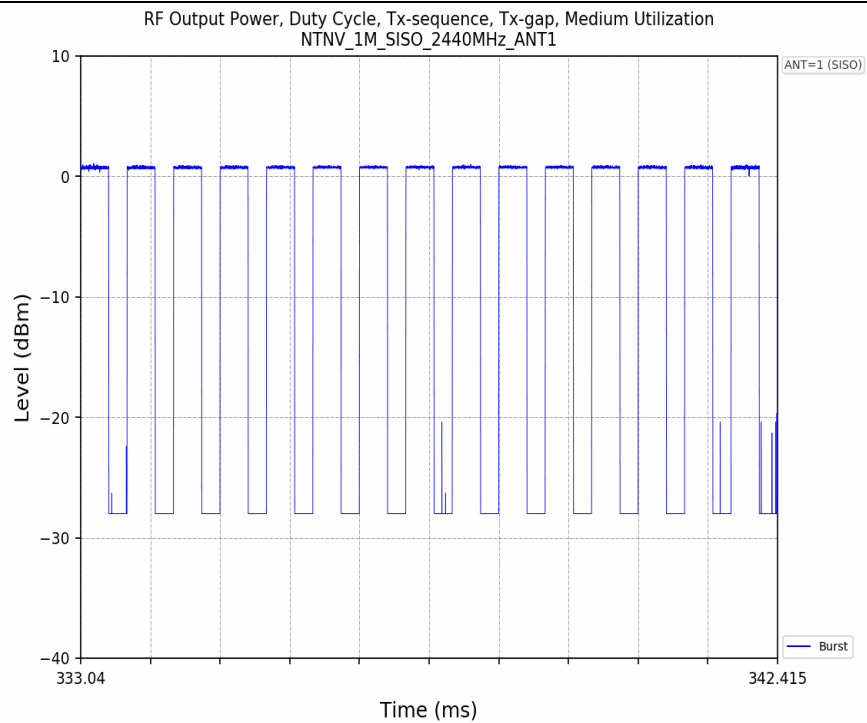

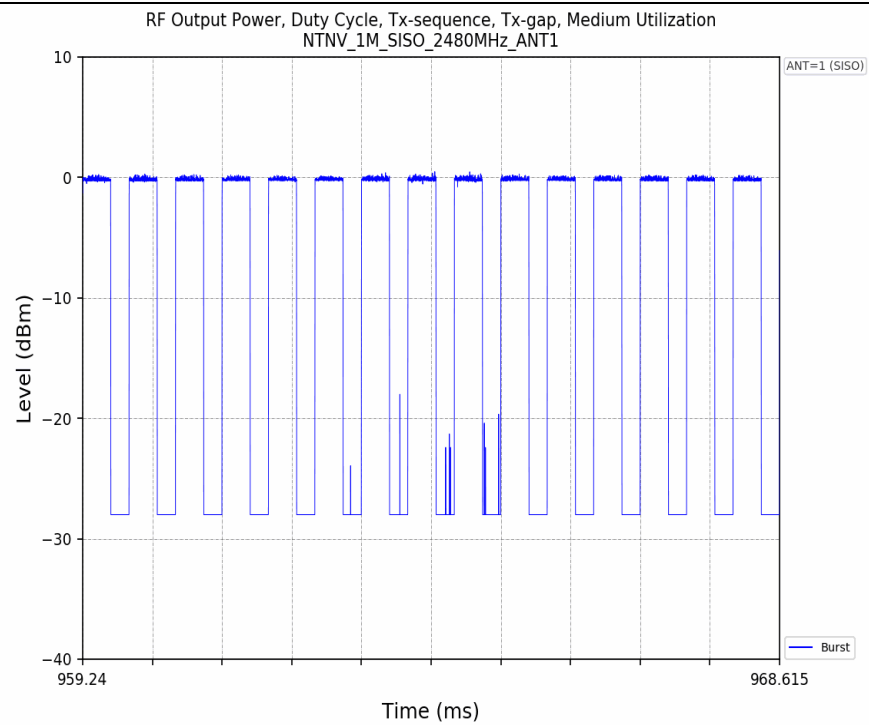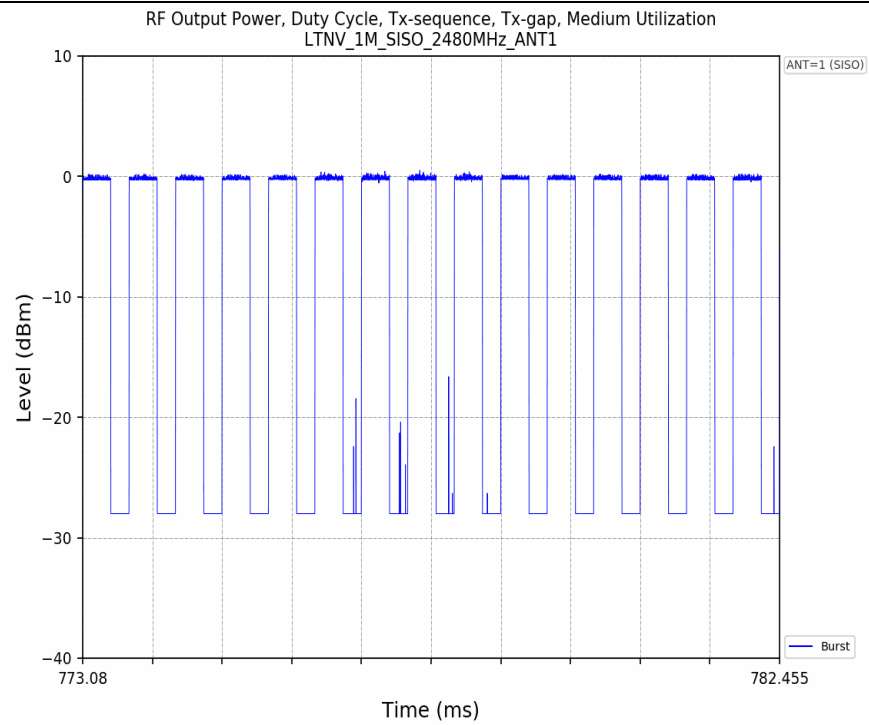


2. Occupied Channel Bandwidth

2.1 Test Result

Test Mode	Test Condition	Test Frequency (MHz)	Ant No.	OBW (MHz)	FL OBW (MHz)	FH OBW (MHz)	Limit (MHz)	Verdict
1M	NTNV	2402	1	1.01	2401.50	/	2400<FL, FH<2483.5	PASS
		2480	1	1.01	/	2480.51	2400<FL, FH<2483.5	PASS

2.2 Test Graph

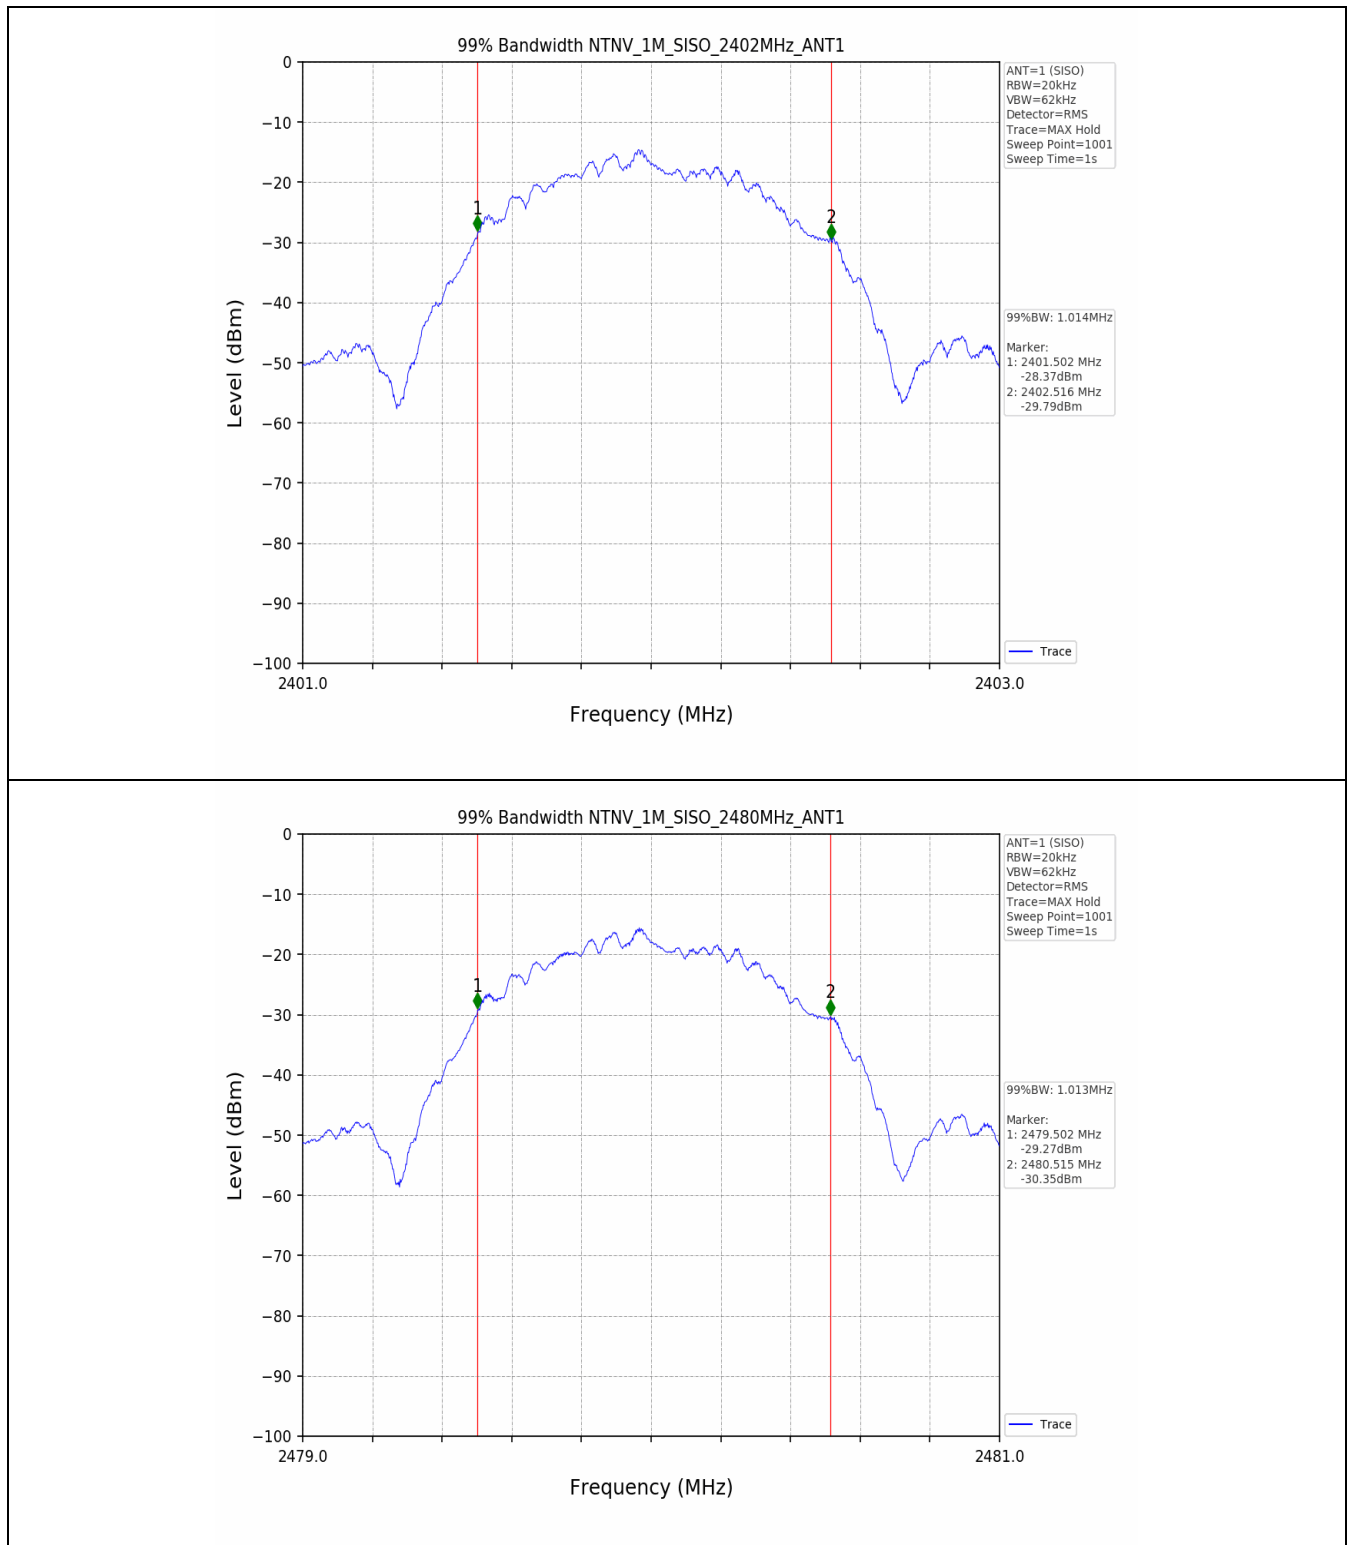




3. Power Spectral Density

3.1 Test Result

Test Mode	Test Condition	Test Frequency (MHz)	Ant No.	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
1M	NTNV	2402	1	0.81	<=10.00	PASS
		2440	1	0.72	<=10.00	PASS
		2480	1	-0.17	<=10.00	PASS

3.2 Test Graph

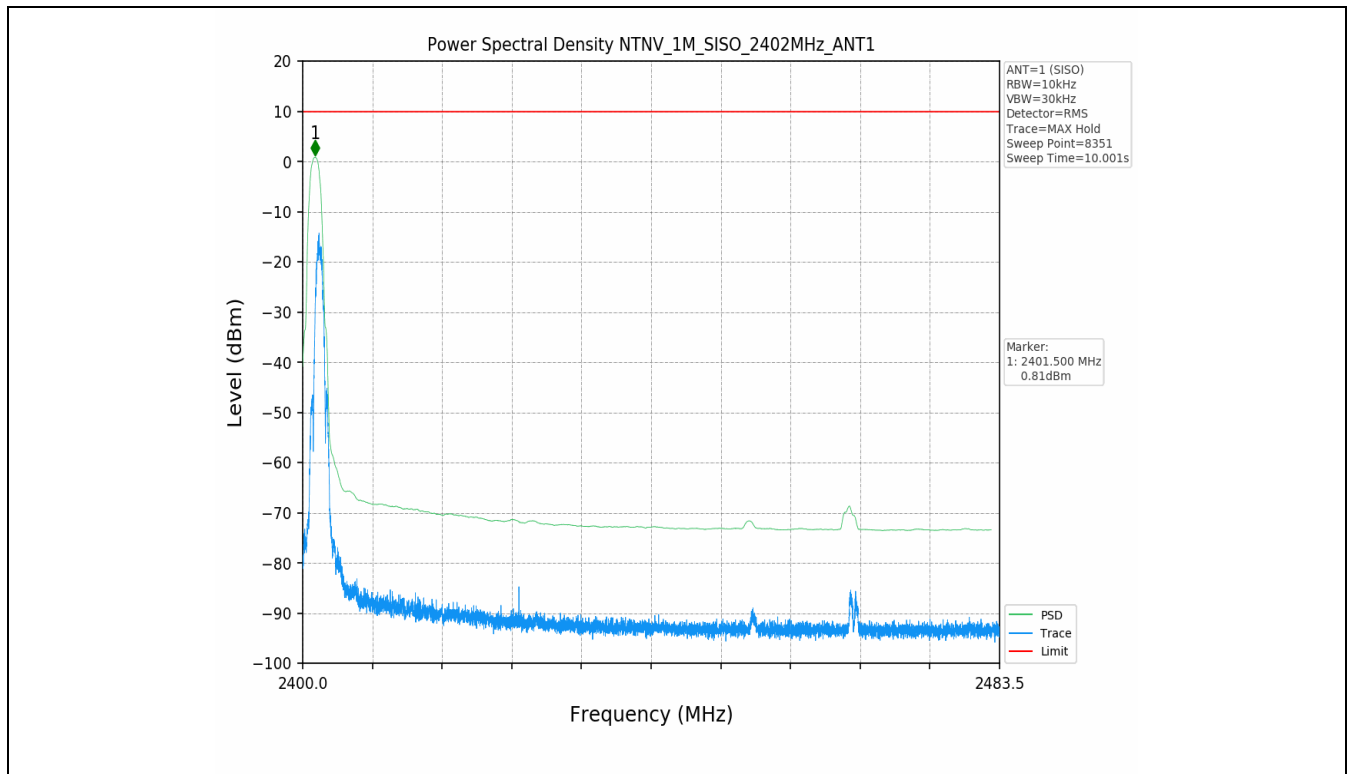

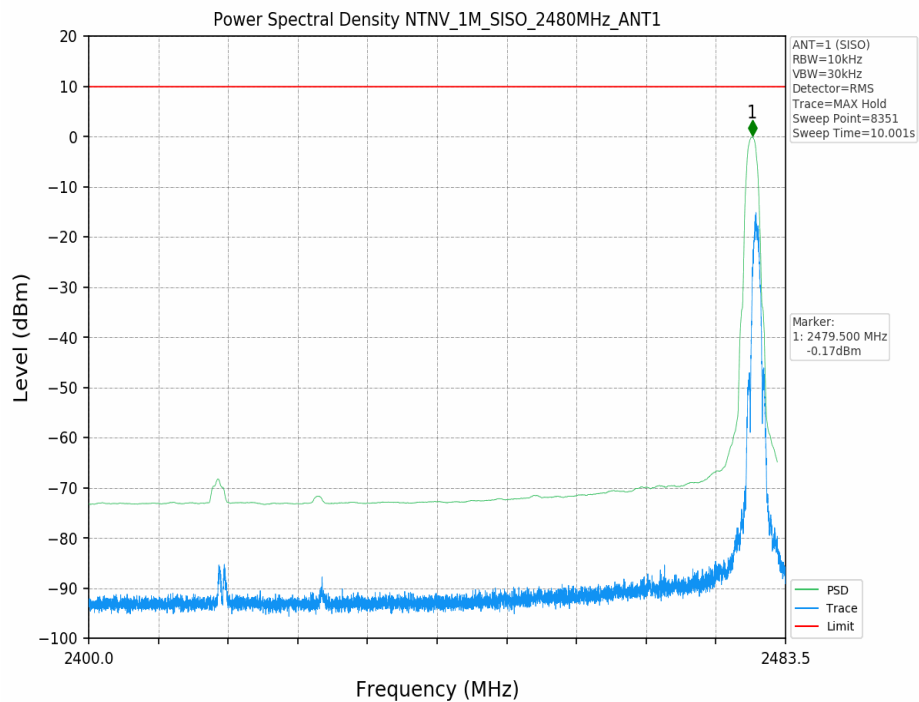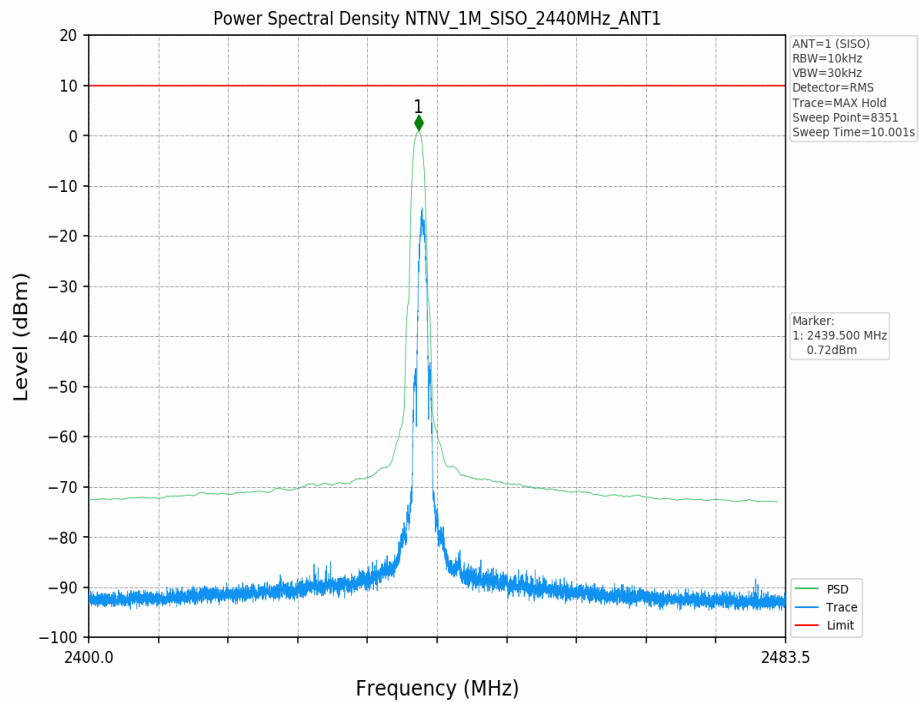


4. Transmitter unwanted emissions in the out-of-band domain

4.1 Test Result

Test Mode	Test Condition	Test Frequency (MHz)	Ant No.	Freq (MHz)	Result (dBm)	Limit (dBm)	Verdict
1M	NTNV	2402	1	2399.500	-56.10	<=-10.0	PASS
				2399.486	-56.28	<=-10.0	PASS
				2398.486	-61.65	<=-20.0	PASS
				2398.472	-61.62	<=-20.0	PASS
		2480	1	2484.000	-62.56	<=-10.0	PASS
				2484.013	-62.60	<=-10.0	PASS
				2485.013	-63.46	<=-20.0	PASS
				2485.026	-63.48	<=-20.0	PASS

4.2 Test Graph

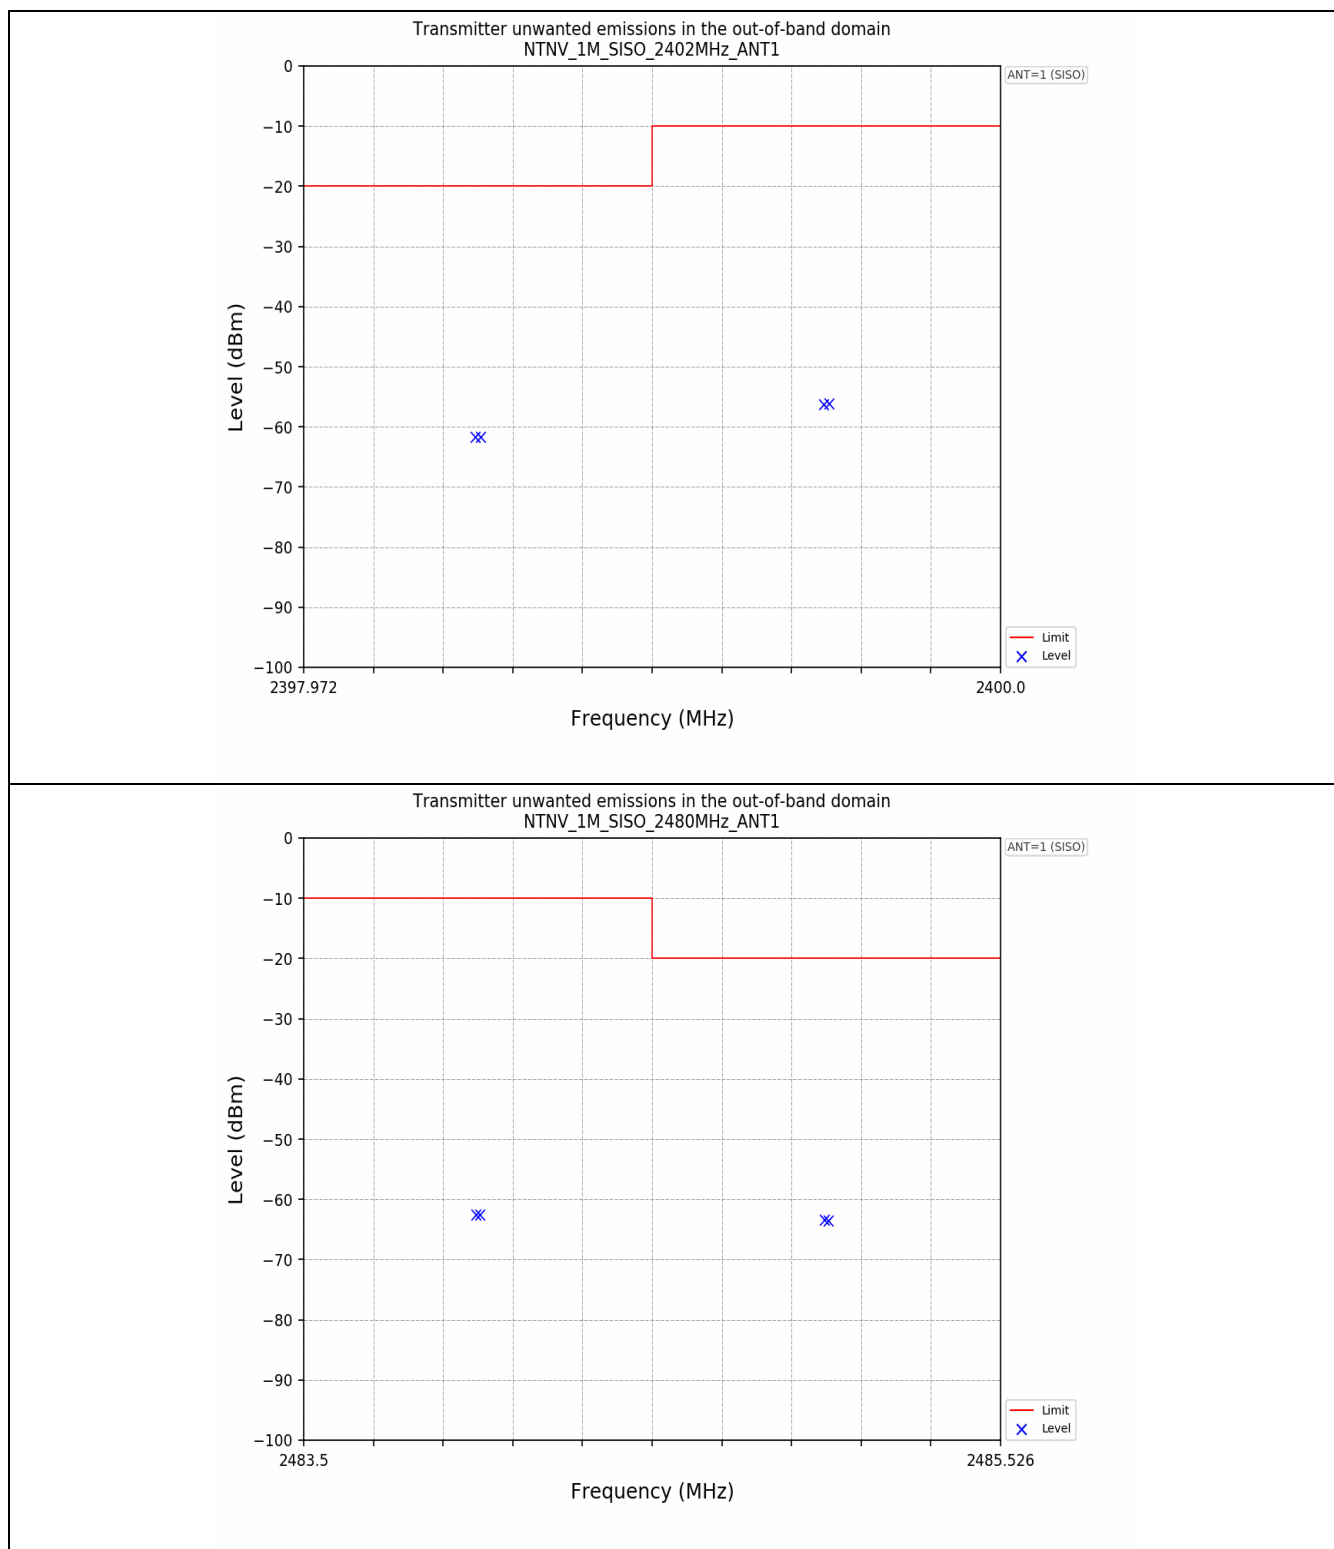

5. Transmitter Unwanted Emissions In The Spurious Domain

5.1 Test Result

The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
102.09	Vertical	-69.49	-54.00	Pass
542.88	V	-65.54	-54.00	
4804.00	V	-50.27	-30.00	
7206.00	V	-45.57	-30.00	
9608.00	V	-41.98	-30.00	
12010.00	V	-43.47	-30.00	
92.82	Horizontal	-66.69	-54.00	
833.56	H	-67.74	-36.00	
4804.00	H	-49.88	-30.00	
7206.00	H	-46.11	-30.00	
9608.00	H	-41.81	-30.00	
12010.00	H	-44.01	-30.00	
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
78.08	Vertical	-65.24	-36.00	Pass
688.46	V	-67.56	-54.00	
4960.00	V	-50.15	-30.00	
7440.00	V	-44.91	-30.00	
9920.00	V	-41.38	-30.00	
12400.00	V	-44.57	-30.00	
83.73	Horizontal	-66.86	-36.00	
854.88	H	-68.20	-36.00	
4960.00	H	-50.12	-30.00	
7440.00	H	-45.74	-30.00	
9920.00	H	-41.71	-30.00	
12400.00	H	-44.00	-30.00	

6. Receiver Spurious Emissions

6.1 Test Result

The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
42.16	Vertical	-70.36	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
473.05	V	-69.60		
4804.00	V	-61.47		
7206.00	V	-57.46		
9608.00	V	-52.42		
12010.00	H	-55.38		
28.09	Horizontal	-70.53		
782.43	H	-69.53		
4804.00	H	-64.34		
7206.00	H	-58.49		
9608.00	H	-53.97		
12010.00	H	-55.49		
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
37.84	Vertical	-66.87	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
743.52	V	-65.17		
4960.00	V	-60.67		
7440.00	V	-55.58		
9920.00	V	-50.89		
12400.00	V	-54.07		
42.29	Horizontal	-69.84		
544.47	H	-67.57		
4960.00	H	-61.39		
7440.00	H	-54.95		
9920.00	H	-51.12		
12400.00	H	-53.02		

7. Receiver Blocking

7.1 Test Result

Receiver Category	Test Channel	Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 2)	PER (%)	Limit (%)	Result
2	Lowest	-67	2380	-34	2.7	10	Pass
			2300		3.5	10	Pass
			2504		2.3	10	Pass
			2584		1.7	10	Pass
	Highest	-68	2380	-34	0.9	10	Pass
			2300		1.6	10	Pass
			2504		2.7	10	Pass
			2584		3.4	10	Pass

-----End-----