

TEST REPORT

Applicant: Quanzhou SKYDROID Technology Co., Ltd.

Address of Applicant: 2nd Floor, Building A, Yucheng Base, Fengze District,
Quanzhou City, Fujian Province, China

Manufacturer/Factory: Quanzhou SKYDROID Technology Co., Ltd.

**Address of
Manufacturer/Factory:** 2nd Floor, Building A, Yucheng Base, Fengze District,
Quanzhou City, Fujian Province, China

Equipment Under Test (EUT)

Product Name: H16 remote control

Model No.: H16, H16PRO

Trade Mark: SKYDROID

Applicable standards: ETSI EN 300 328 V2.2.2 (2019-07)

Date of sample receipt: October 21, 2020

Date of Test: October 22, 2020-November 03, 2020

Date of report issue: November 04, 2020

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Version

Version No.	Date	Description
00	November 04, 2020	Original

Prepared By:




Date:

November 04, 2020

Project Engineer

Check By:



Date:

November 04, 2020

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST FACILITY	7
5.3 TEST LOCATION	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 DEVIATION FROM STANDARDS	7
5.6 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
6 TEST INSTRUMENTS LIST	8
7 RADIO TECHNICAL SPECIFICATION IN ETSI EN 300 328	10
7.1 TEST ENVIRONMENT AND MODE	10
7.2 TRANSMITTER REQUIREMENT	11
7.2.1 RF Output Power	11
7.2.2 Power Spectral Density	11
7.2.3 Medium Utilisation (MU) factor	12
7.2.4 Occupied Channel Bandwidth	13
7.2.5 Transmitter unwanted emissions in the OOB domain	14
7.2.6 Transmitter unwanted emissions in the spurious domain	15
7.3 RECEIVER REQUIREMENT	16
7.3.1 Spurious Emissions	16
7.3.2 Receiver Blocking	17
8 TEST SETUP PHOTO	18
9 EUT CONSTRUCTIONAL DETAILS	18

4 Test Summary

Radio Spectrum Matter (RSM) Part of Tx					
Test	Test Requirement	Test method	Limit/Severity	Uncertainty	Result
RF Output Power	Clause 4.3.2.2	Clause 5.4.2.2	20dBm	±1.5dB	PASS
Power Spectral Density	Clause 4.3.2.3	Clause 5.4.3.2	10dBm/MHz	±3dB	PASS
Duty Cycle, Tx-sequence, Tx-gap	Clause 4.3.2.4	Clause 5.4.2.2.1.3	Clause 4.3.2.4.3	±5 %	N/A
Medium Utilisation (MU) factor	Clause 4.3.2.5	Clause 5.4.2.2.1.4	≤ 10%	±5 %	PASS
Adaptivity	Clause 4.3.2.6	Clause 5.4.6.2	Clause 4.3.2.6.2.2 & Clause 4.3.2.6.3.2 & Clause 4.3.2.6.4.2	--	N/A*
Occupied Channel Bandwidth	Clause 4.3.2.7	Clause 5.4.7.2	Clause 4.3.2.7.3	±5 %	PASS
Transmitter unwanted emissions in the OOB domain	Clause 4.3.2.8	Clause 5.4.8.2	Clause 4.3.2.8.3	±3dB	PASS
Transmitter unwanted emissions in the spurious domain	Clause 4.3.2.9	Clause 5.4.9.2	Clause 4.3.2.9.3	±6dB	PASS
Radio Spectrum Matter (RSM) Part of Rx					
Receiver spurious emissions	Clause 4.3.2.10	Clause 5.4.10.2	Clause 4.3.2.10.3	±6dB	PASS
Receiver Blocking	Clause 4.3.2.11	Clause 5.4.11.2	Clause 4.3.2.11.4	--	PASS
Geo-location capability	Clause 4.3.2.12	--	--	--	N/A

Remark:

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

Temperature (Uncertainty): ±1°C Humidity(Uncertainty): ±5%

Uncertainty: ± 3%(for DC and low frequency voltages)

N/A*: not applicable for the EUT belongs to non-adaptive device

5 General Information

5.1 General Description of EUT

Product Name:	H16 remote control
Model No.:	H16, H16PRO
Test Model No.:	H16
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is model name for commercial purpose.	
Operation Frequency:	2410MHz~2470MHz
Channel Separation:	13
Channel separation:	5MHz
Modulation Technology:	DSSS
Antenna Type:	Integral Antenna
Antenna Gain:	3.0dBi
Power Supply:	ADAPTOR MODEL:KXS-012 INPUT: 110V-240V~50/60Hz 0.5A max OUTPUT: 3.6V-6V 3A or 6V-9V 32A or 9V-12V 31.5A Or DC 3.7V Battery

WIFI Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	13	2472MHz
2	2417MHz	6	2437MHz	10	2457MHz		
3	2422MHz	7	2442MHz	11	2462MHz		
4	2427MHz	8	2447MHz	12	2467MHz		

The EUT operation in above frequency list, and used test software to control the EUT for staying in continuous transmitting and receiving mode. So test frequency is below:

Test channel	Frequency (MHz)
Lowest channel	2410MHz
Middle channel	2440MHz
Highest channel	2470MHz

5.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0.

5.3 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Deviation from Standards

None.

5.6 Abnormalities from Standard Conditions

None.

5.7 Other Information Requested by the Customer

None.

6 Test Instruments List

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Radio Technical Specification in ETSI EN 300 328

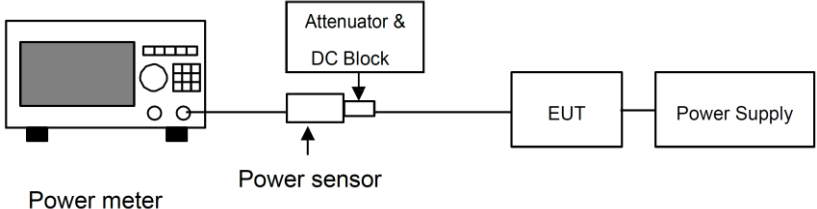
7.1 Test Environment and Mode

Test mode:			
Transmitting mode:		Keep the EUT in transmitting mode with modulation.	
Receiving mode		Keep the EUT in receiving mode.	
Operating Environment:			
Item	Normal condition	Extreme condition	
		HT	LT
Temperature	+15°C to + 35°C	+40°C	0°C
Voltage(AC)	230V		
Humidity	20%-95%		
Atmospheric Pressure:	1008 mbar		

Setting	Value
Modulation	Other
Adaptive	Yes
Antenna Gain	3.0dBi
Nominal Channel Bandwidth	20MHz
DUT Frequency not configurable	No
Frequency Low	2410MHz
Frequency Mid	2440MHz
Frequency High	2470MHz

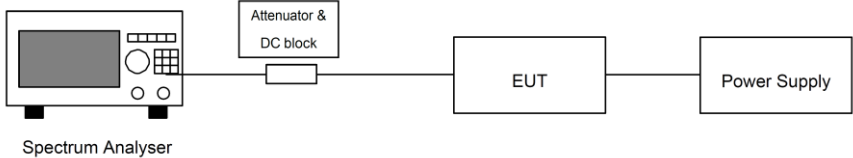
7.2 Transmitter Requirement

7.2.1 RF Output Power

Test Requirement:	ETSI EN 300 328 clause 4.3.2.2
Test Method:	ETSI EN 300 328 clause 5.4.2.2.1.2
Limit:	20dBm
Test setup:	
Measurement Record:	Uncertainty: 0.65dB
Test Instruments:	See section 6.0
Test mode:	Transmitting mode

Measurement Data: The detailed test data see Appendix for 2.4G

7.2.2 Power Spectral Density

Test Requirement:	ETSI EN 300 328 clause 4.3.2.3
Test Method:	ETSI EN 300 328 clause 5.4.3.2.1
Limit:	10dBm/MHz
Test setup:	
Measurement Record:	Uncertainty: 1.31dB
Test Instruments:	See section 6.0
Test mode:	Transmitting mode

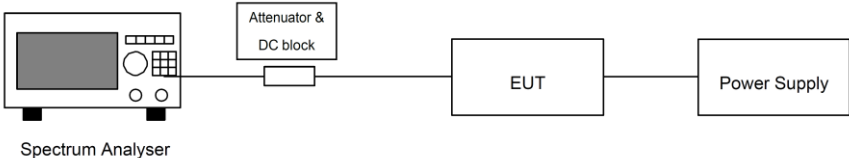
Measurement Data: The detailed test data see Appendix for 2.4G

7.2.3 Medium Utilisation (MU) factor

Test Requirement:	ETSI EN 300 328 clause 4.3.2.5
Limit:	<10%
Measurement Record:	Uncertainty: N/A
Test Instruments:	See section 6.0
Result	Pass

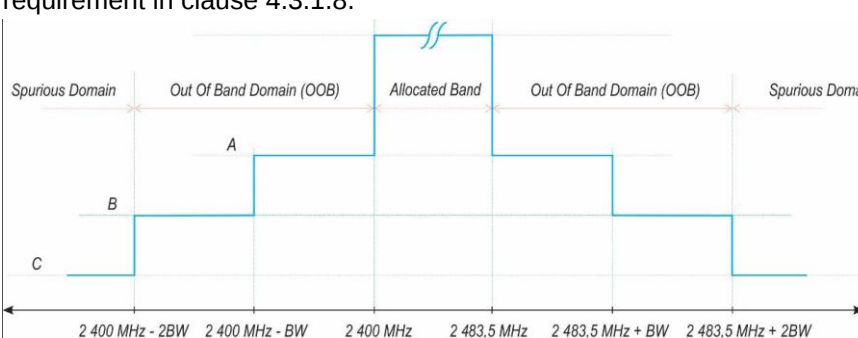
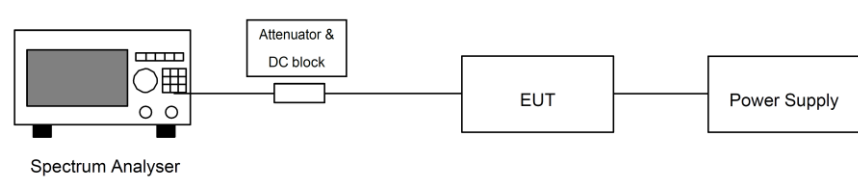
Channel	Power (dbm)	Power (mw)	Duty cycle	MU	Verdict
Lowest	15.11	32.434	10.01%	3.2%	PASS
Middle	16.65	46.238	10.01%	4.6%	PASS
Highest	16.96	49.659	10.01%	5.0%	PASS

7.2.4 Occupied Channel Bandwidth

Test Requirement:	ETSI EN 300 328 clause 4.3.2.7
Limit:	The Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band 2400MHz ~ 2483.5MHz. In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p. greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.
Test setup:	 <pre> graph LR SA[Spectrum Analyser] --- A[Attenuator & DC block] A --- EUT[EUT] EUT --- PS[Power Supply] </pre>
Test Instruments:	See section 6.0
Test mode:	Transmitting mode

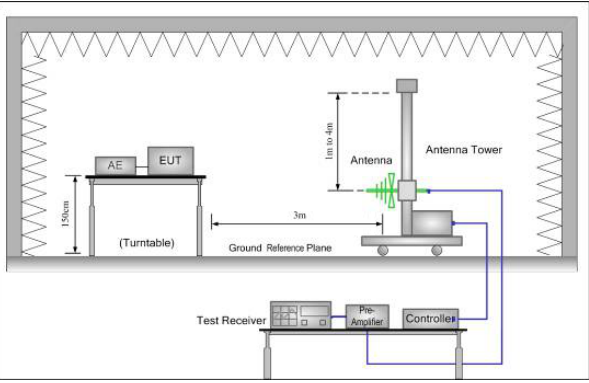
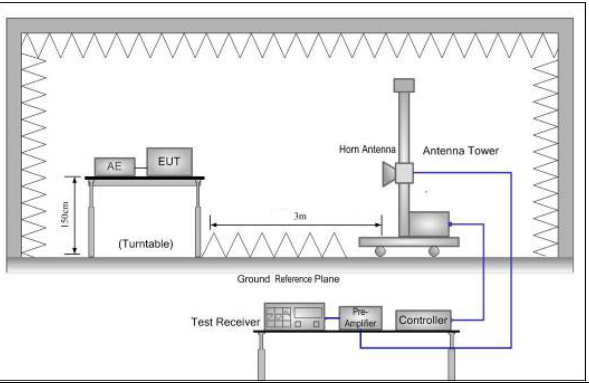
Measurement Data: The detailed test data see Appendix for 2.4G

7.2.5 Transmitter unwanted emissions in the OOB domain

Test Requirement:	ETSI EN 300 328 clause 4.3.2.8
Test Method:	ETSI EN 300 328 clause 5.4.8.2
Limit:	The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 1 Within the band specified in table 1, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 4.3.1.8.  A: -10 dBm/MHz e.i.r.p. B: -20 dBm/MHz e.i.r.p. C: Spurious Domain limits BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater
Test setup:	 Spectrum Analyser Attenuator & DC block EUT Power Supply
Measurement Record:	Uncertainty: $\pm 1.5\text{dB}$
Test Instruments:	See section 6.0
Test mode:	Transmitting mode
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G

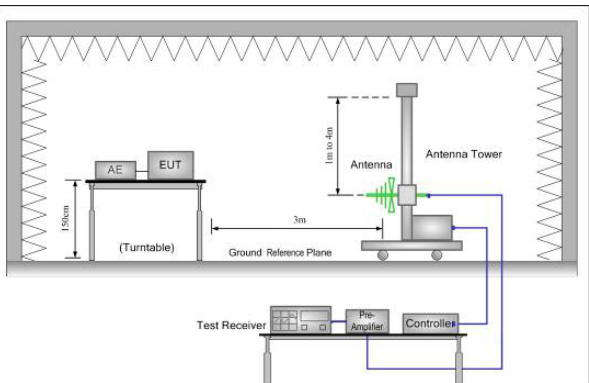
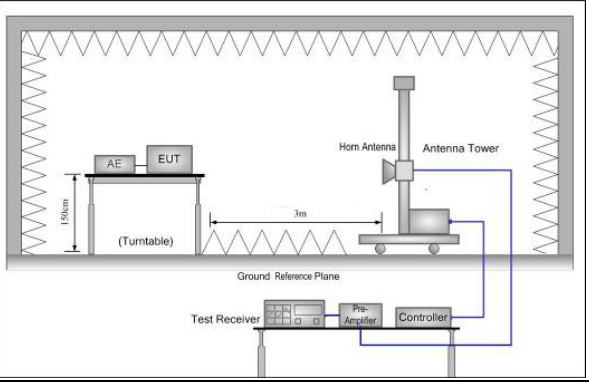
7.2.6 Transmitter unwanted emissions in the spurious domain

Test Requirement:	ETSI EN 300 328 clause 4.3.2.9		
Test Method:	ETSI EN 300 328 clause 5.4.9.2		
Limit:	Frequency Range	Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
	30 MHz to 47 MHz	-36 dBm	100 kHz
	47 MHz to 74 MHz	-54 dBm	100 kHz
	74 MHz to 87.5 MHz	-36 dBm	100 kHz
	87.5 MHz to 118 MHz	-54 dBm	100 kHz
	118 MHz to 174 MHz	-36 dBm	100 kHz
	174 MHz to 230 MHz	-54 dBm	100 kHz
	230 MHz to 470 MHz	-36 dBm	100 kHz
	470 MHz to 694 MHz	-54 dBm	100 kHz
	694 MHz to 1 GHz	-36 dBm	100 kHz
	1 GHz to 12.75 GHz	-30 dBm	1 MHz
Test Frequency range:	30MHz to 12.75GHz		
Test setup:	Below 1GHz		
			
	Above 1GHz		
			
Measurement Record:	Uncertainty: 4.64dB		
Test Instruments:	See section 6.0		
Test mode:	Transmitting mode		

Measurement Data: The detailed test data see Appendix for 2.4G

7.3 Receiver Requirement

7.3.1 Spurious Emissions

Test Requirement:	ETSI EN 300 328 clause 4.3.2.10		
Test Method:	ETSI EN 300 328 clause 5.4.10.2		
Limit:	Frequency	Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Measurement bandwidth
	30MHz to 1000 MHz	-57 dBm	100 kHz
	1GHz to 12.75GHz	-47 dBm	1 MHz
Test Frequency range:	30MHz to 12.75GHz		
Test setup:	Below 1GHz  Above 1GHz 		
Measurement Record:	Uncertainty: 4.64dB		
Test mode:	Receiving mode		
Test Instruments:	See section 6.0		

Measurement Data: The detailed test data see Appendix for 2.4G

7.3.2 Receiver Blocking

Test Requirement:	ETSI EN 300 328 clause 4.3.2.11																		
Test Method:	ETSI EN 300 328 clause 5.4.11.2.																		
Limit:	While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8. Table 6: Receiver Blocking parameters for Receiver Category 1 equipment <table><tr><th>Wanted signal mean power from companion device (dBm) (see notes 1 and 4)</th><th>Blocking signal frequency (MHz)</th><th>Blocking signal power (dBm) (see note 4)</th><th>Type of blocking signal</th></tr><tr><td>$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)</td><td>2 380 2 504</td><td rowspan="2">-34</td><td rowspan="2">CW</td></tr><tr><td>$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)</td><td>2 300 2 330 2 360 2 524 2 584 2 674</td></tr></table> NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2. Table 7: Receiver Blocking parameters receiver Category 2 equipment <table><tr><th>Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</th><th>Blocking signal frequency (MHz)</th><th>Blocking signal power (dBm) (see note 3)</th><th>Type of blocking signal</th></tr><tr><td>$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)</td><td>2 380 2 504 2 300 2 584</td><td>-34</td><td>CW</td></tr></table> NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.	Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal	$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW	$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674	Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal																
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW																
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674																		
Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal																
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW																

	<table><tr><th colspan="4">Table 8: Receiver Blocking parameters receiver Category 3 equipment</th></tr><tr><th>Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</th><th>Blocking signal frequency (MHz)</th><th>Blocking signal power (dBm) (see note 3)</th><th>Type of blocking signal</th></tr><tr><td>(-139 dBm + 10 × log₁₀(OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)</td><td>2 380 2 504 2 300 2 584</td><td>-34</td><td>CW</td></tr><tr><td colspan="4">NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative the test may be performed using a wanted signal up to P_{min} + 30 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</td></tr></table>	Table 8: Receiver Blocking parameters receiver Category 3 equipment				Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	(-139 dBm + 10 × log ₁₀ (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW	NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative the test may be performed using a wanted signal up to P _{min} + 30 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			
Table 8: Receiver Blocking parameters receiver Category 3 equipment																	
Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal														
(-139 dBm + 10 × log ₁₀ (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW														
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative the test may be performed using a wanted signal up to P _{min} + 30 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.																	
Test setup:	<pre>graph LR SUCD[Signalling Unit or Companion Device] <--> ATT1[ATT.] BSS[Blocking Signal Source] --> SC[Splitter/Combiner] ATT1 <--> SC SC --> DC[Direct Coupler] SC --> SA[Spectrum Analyzer] DC <--> ATT2[ATT.] ATT2 <--> UUT[UUT] UUT <--> PMD[Performance Monitoring Device]</pre>																
Measurement Record:	Uncertainty: N/A																
Test Instruments:	See section 6.0																
Test mode:	Normal link mode																

Measurement Data: The detailed test data see Appendix for 2.4G

8 Test setup photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----